




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04N 7/025, 7/52</b>		<b>A2</b>	(11) International Publication Number: <b>WO 97/02700</b>
			(43) International Publication Date: 23 January 1997 (23.01.97)
(21) International Application Number: PCT/IB96/00629 (22) International Filing Date: 1 July 1996 (01.07.96) (30) Priority Data: 95201808.3      3 July 1995 (03.07.95)      EP (34) Countries for which the regional or international application was filed: NL et al. 95202304.2      25 August 1995 (25.08.95)      EP (34) Countries for which the regional or international application was filed: NL et al. (71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE). (72) Inventors: CLARK-SCHREYER, Veronika; Wiedner Hauptstrasse 33/12, A-1040 Vienna (AT). ERKINGER, Erwin; Meißauergasse 30, A-1220 Vienna (AT). (74) Agent: SCHMITZ, Herman, J., R.; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).		(81) Designated States: AU, BR, CA, CN, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i>	

(54) Title: TRANSMISSION OF GRAPHIC IMAGES

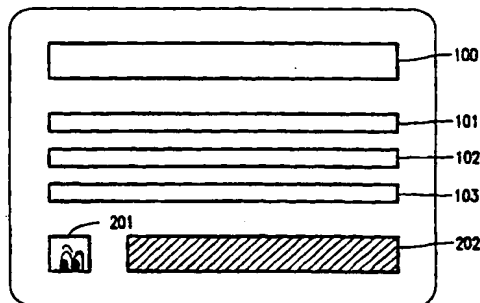

## (57) Abstract

A method and arrangements for transmitting, receiving and displaying graphic images. The graphic images include dynamic icons (dynacons), i.e. graphic subpictures comprising two or more motion phases. By alternately displaying said motion phases, an attractive motion is created. They enhance the appearance of graphic images considerably. This is especially useful in the transmission of an electronic television program guide, e.g. to indicate the type of television programs to come.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## Transmission of graphic images.

The invention relates to a method of transmitting graphic images, comprising the step of transmitting data defining pixels of a displayable subpicture, and the step of transmitting data invoking said subpicture for display on a receiver. The invention also relates to a television receiver and a display device for receiving and displaying said  
5 graphic images.

A method of transmitting graphic images is generally known as teletext. Herein, images are transmitted in the form of pages, each page comprising a plurality of character codes defining the alphanumeric and graphical characters of said page. Pixel  
10 patterns defining the commonly used characters are stored in a read-only memory section of the receiver. The known arrangements render it possible for characters, or series of characters, to "flash", i.e. to be concealed and revealed at a predetermined frequency. This allows a dynamic effect to be added to a page.

More sophisticated teletext systems (level 3) provide a feature usually  
15 referred to as "Dynamically Redefinable Character Sets". This feature allows a page editor to define the pixel pattern of characters at the transmitter end, and to download said patterns to the receiver for storage in a random access memory prior to the transmission of the page.

It is an object of the invention to further improve the appearance of an  
20 image on screen.

According to the invention, the method is characterized in that the step of transmitting pixel defining data includes the transmission of pixel defining data for at least two motion phases of said subpicture to be displayed cyclically. The transmission step may include the transmission of a time code representing a time interval between displaying the  
25 successive motion phases of said subpicture. The graphic image can thus be enhanced with dynamic icons ("dynacons").

Fig.1 shows a system comprising a transmitter and a receiver according to the invention.

Fig.2 shows a flowdiagram of transmission steps executed by the transmitter of Fig.1.

Figs. 3-7 show examples of subpictures having different motion phases for display by the receiver shown in Fig.1.

5 Fig.8 shows an image to be displayed by the receiver of Fig.1.

Fig.9 shows a flow chart of operations carried out by a microprocessor shown in Fig.1.

Figs. 10-12 show embodiments of the display section of the receiver shown in Fig.1.

10

The invention will now be described with reference to the transmission of menus for accessing a (separately transmitted) electronic TV programme guide. The invention, however, is not restricted to this application. Fig.1 shows a system comprising a transmitter 1 and a receiver 2 according to the invention. The transmitter comprises an editing terminal 11 for creating textual and graphical information, a processor 12, a memory 13 for storing the information, and a page composer 14 for packing the information into teletext pages TXT. The transmitter further comprises a teletext inserter 15 for inserting the teletext pages in the flyback period of a composite video signal CVBS. The thus obtained television signal is applied to a modulator 16 for broadcast over a transmission medium 3.

20 The receiver comprises a tuner 21 for receiving the television signal. The received signal is directly applied to a television monitor 22 so as to display the television programme. The signal is also applied to a teletext data decoder 23 which is adapted to acquire selected teletext pages and to store them in a memory 24. A microprocessor 25 is connected to decoder 23 so as to apply the relevant page numbers, and is further connected to the memory 24 so as to process the information stored therein. The receiver further comprises a graphic generator 26 adapted to read a predetermined display segment of memory 24 and to generate an On-Screen-Display picture OSD defined by data stored in said memory segment. The OSD picture includes a cursor, the position of which is defined by the microprocessor in response to positioning signals from a remote cursor control device 27.

30 In practice, the receiver described above may take the form of a videorecorder. The videorecorder may have an embedded display device 22 or an output for applying the display signals CVBS and OSD to a separate display device 22 such as a television set.

### Operation of the transmitter


The electronic programme guide as well as the menus for accessing and presenting the programme guide are created by editorial staff using editing terminal 11. The information is processed by processor 12 and stored in various segments of memory 13.

- 5 Each memory segment defines an amount of data which will further be referred to as a section of the database. The page composer 14 packs each section in one or more teletext pages. As the teletext pages are not intended for direct display, they have hexadecimal page numbers. Data which is most sensible data to transmission errors, such as headers, dates and times, string lengths, teletext page numbers, etc., are protected by a Hamming code. The
- 10 first teletext page has a predetermined page number (e.g. 3A0) and contains a table of content. This is a list of teletext page numbers carrying the data stream. If the table of content does not fit in one teletext page, a reference to subsequent teletext pages is made.

- Fig.2 shows a flowdiagram of transmission steps executed by the transmitter of Fig.1. Each step represents the transmission of a section of the database. Each
- 15 section relates to a certain functionality and comprise data items such as parameters, values, text strings, attributes, etc. In a step 31, a Basic Info section is transmitted comprising basic data such as date and time and some other general data so as to ease the management of memory in a television receiver. In a step 32, a Layout Info section is transmitted defining a variety of design tools for composing the electronic programme guide. In a step 33, a
- 20 Graphics section is transmitted in which a plurality of graphic subpictures is defined for display on screen. In a step 34, a Menu Info section is transmitted conveying the menus for accessing the program guide. In a step 35, a Programme Info section is transmitted for building up the TV programme guide database. The transmission of the database ends with a step 36 of transmitting an End-of-Protocol code. The database is transmitted regularly, e.g. a
- 25 few times per day.

The sections will now be described in more details. As not all section are equally essential to the invention, some sections will only briefly be discussed. In the following description, sections are shown in double framed boxes. A collection of data items


in a section may constitute a block. Blocks are shown in single framed boxes. A ++ symbol is placed next to a data item or block if it is repeatedly transmitted. For example, a section:

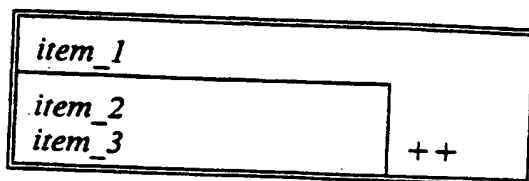

comprises three data items of which the block comprising *item\_2* and *item\_3* may be repeated. Each section starts with a header. This is a code identifying the section and indicating its beginning. The type of the data items (such as byte, character, string) is not given here because it is not essential to the invention.

#### The section Basic Info

This section comprises basic data such as date and time and some other general data so as to ease the management of memory in a television receiver. The Basic Info section has the following format:

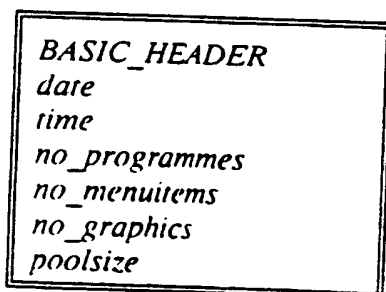

Herein, *date* and *time* represent the date and time of issue of the database. *No\_programmes* is the number of television programmes contained in the Programme Info section. *No\_menuitems* is the number of menu items in the Menu Info section. *No\_graphics* is the total number of graphics, including the logos defined in the Table Info section. *Poolsize* is the total size of all the titles, programme infos and descriptions and criteria names.

#### The section Layout Info


This section gives a variety of design tools to the supplier of the electronic programme guide. The format of this section is:

<i>LAYOUT_HEADER</i>		
<i>no_of_colours</i>		
<i>colour++</i>		
<i>screen_size</i>		
<i>no_of_arrgmnts</i>		
<i>no_of_levels</i>		
<i>level</i>		
<i>layout_data</i>	++	++

- No\_of\_colours* and *colour++* define the length and contents, respectively, of a colour look up table. By default, a standard teletext colour table is used. The rest of the section specifies
- 5 the appearance of the various menus on screen. *Screen\_size* gives the full screen size in pixels, in horizontal and vertical direction. Because the menus are organized in a tree structure, each menu is assigned a *level* of which there are *no\_of\_levels* available. As will be described later, two menus of different levels may be displayed simultaneously. This is referred to as an "arrangement". The number of arrangements is specified by
- 10 *no\_of\_arrgmnts*. The item *layout\_data* is a block of data defining features such as height, font, colours, position, spacing, etc., of headlines and menu items of the menu.

### The section Graphics

In this section, one or more graphic subpictures (hereinafter also referred to as "graphics" for short) are defined which can be displayed on screen. The general format of this section is:

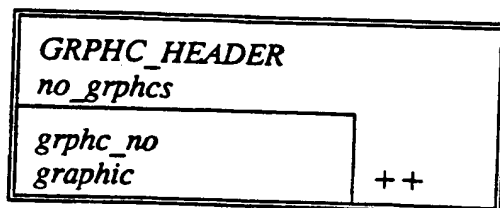

Herein, *no\_grphcs* gives the number of graphics defined in the section. *Grphc\_no* is an index number for invoking the subpictures. The data item *graphic* itself is a block of data defining a rectangular subpicture. Four types of graphics are being distinguished in this protocol: bitmaps, symbols, dynacons, and text strings. A bitmap is the general term for a graphic. It is a rectangular matrix of pixels forming a subpicture. Symbols and dynacons are bitmaps as well, but with special conventions. Symbols are intended for use within text strings. A text including a symbol comprises an escape character followed by *graphic\_no* to invoke the symbol. Dynacons consist of a predefined sequence of 2 or more bitmaps. Each bitmap represents one motion phase of the dynacon. By cyclically displaying said motion phases, the viewer sees one bitmap after the other, which becomes manifest as a simple animation of the subpicture. The period of time during which each phase is to be displayed can be fixed in the receiver, or may be transmitted as a data item in the section. A dynacon with one single phase is a symbol. The phases "overload" the colour table, per phase there is one complete colour table as common from a bitmap. Dynacons can be used like symbols. Figs. 3-7 show examples of dynacons, each having two motion phases. The two motion phases shown in Fig.3 give an impression of blinking eyes for drawing the user's attention to a particular piece of information. Figs. 4-7 are intended to be added to a preview of a television programme. Fig.4 represents a movie, Fig.5 represents a programme for children, Fig.6 a live performance, and Fig.7 shows two phases giving an impression of flapping wings so as to represent a documentary film about the bird's life.

Bitmaps, symbols and dynacons may be encoded either pixel-by-pixel or by using a run-length code. Both the type of graphics and the method of encoding are defined by the section header which has a plurality of possible values for this purpose.



For pixel-by-pixel encoded bitmaps, symbols and dynacons, the format of the block *graphic* is:

```
bits_per_colour
colour_table
x_tlcorner
y_tlcorner
x_xtns
y_xtns
pixel_block
```

Herein, *bits\_per\_colour* defines the number of colours which can be used, and *colour\_table* is an array of three values defining each colour in terms of red, green and blue levels. The parameters *x\_tlcorner* and *y\_tlcorner* define the position of the bitmap on screen in terms of a character location. The parameters *x\_xtns* and *y\_xtns* define the size of the bitmap on the screen in pixels. *Pixel\_block* defines the colour of each pixel in terms of an index to the colour look up table in a predetermined scanning order. Every colour index consists of *bits\_per\_colour* bits.

For run-length-encoded bitmaps, symbols and dynacons, the format of the block *graphic* is:

```
bits_per_colour
colour_table
x_tlcorner
y_tlcorner
x_xtns
y_xtns
pblsize
pixel_block
```

The same definitions as above apply. The parameter *pblsize* defines the size of *pixel\_block* which now accommodates a plurality of run-length codes. Methods for run-length coding graphic images are generally known.

15

The section Menu Info

The section Menu Info conveys the menus to access the program guide and can also be used to transport non-programme information, e.g. news or help. It defines a hierarchically structured tree of charts, each chart consisting of a headline and several items. Each item may expand to a new, more detailed sub chart. The transmission format of the

5 section Menu Info is shown in the following Table:

<i>MENU_HEADER</i>	
<i>no_of_items</i>	
<i>item_no</i>	++
<i>level</i>	
<i>menu_item</i>	
<i>no_of_attributes</i>	
<i>attribute</i> ++	

*Item\_no* is an item number assigned to a *menu\_item* in the range from 0 up to and inclusive *no\_of\_items*-1. *Level* is an unsigned number, telling how deep in the tree the menu comprising this item lays. *Menu\_item* is a string of characters representing an information item. The first *menu\_item* at a given level of a menu is the headline of said menu.

10 Basically, the text string defined by *menu\_item* is to be displayed as such as a menu item on screen. However, if its first character is a special character, *menu\_item* represents a reference to a string stored elsewhere in a television receiver, e.g. a piece of text in a particular teletext page, or a programme title transmitted in the Programme Info section.

15 Each *menu\_item* in the section may have zero, one or more *attributes* assigned to it, the number of attributes being given by *no\_of\_attributes*. An attribute is a block of data comprising a header defining the attribute as well as the kind and format of the subsequent data. Some attributes enhance or extend the menu item, others define a criterion to be applied to the stored information items so as to obtain a list of information items

20 fulfilling said criterion. Some examples of attributes will now be described.

Attributes INS\_DATE and INS\_TIME specify that the current date and/or time are to be inserted in the menu item. A specification of the display format (e.g. "14:22" or "2.22 a.m.") may be included.

25 An attribute GRPHCS specifies the *graph\_no* of a graphic subpicture to be displayed. If the attribute is connected to a menu headline (the first *menu\_item* at a given

level), the subpicture is to be displayed during the time that the relevant menu is displayed. If the attribute is connected to selectable menu items, the subpicture pops up when the cursor touches that item on screen.

An attribute LINKEDITEM establishes a link between a menu item and other displayable information so as to display both simultaneously. Some possible links (e.g. to graphic subpictures) have already been mentioned. The attribute can be added to menu items as well as programmes (see section Programme Info). The display area where to put the linked element on screen is specified. The linked item is displayed whenever the item with the attribute is the only one on the screen or whenever the cursor touches it.

Links can be established to an element of a different section or to a (piece of a) teletext page. A link can also by itself define a text string to be displayed. This is defined by a code immediately following the attribute header.

An attribute MULTILEVEL instructs the receiver to display two levels of a menu simultaneously on one screen. The attribute is added to the headline of a menu at a given level, and specifies whether the next higher level or the next lower level is to be displayed.

#### The section Programme Info

Whereas the section Menu Info is to construct a menu tree to navigate through the database, the section Programme Info is to build up the database of television programmes. The section conveys all programmes, which become available within the program guide, and contains all the necessary information needed for searching programmes fulfilling a certain criterion (e.e. data and time of transmission, category). A detailed explanation is omitted here as it is not relevant to the invention.

#### Example of a menu page

Fig.8 shows an example of a menu page to be displayed. The menu comprises a headline 100 (e.g. the string "MAIN MENU"), a first menu item 101 (e.g. "TV Guide"), a second menu item 132 ("FastFinder") and a third menu item 150 ("User's Guide"). The image further includes a subpicture 202, e.g. an important broadcaster message. In order to draw the user's attention to said message, a dynacon 201 is displayed next to it. The relevant data in the section Menu Info for defining the screen of Fig.8 is: Herein, item number 0 defines the headline whereas item numbers 1-3 define three menu items which are selectable the user. The two attributes {GRPHCS,...} attached to the

```

item_no=0, level=0, item="MAIN MENU", no_of_attributes=2,
attribute={GRPHCS,...},{GRPHCS,...};
item_no=1, level=0, item="TV Guide", no_of_attributes=0;
item_no=2, level=0, item="FastFinder", no_of_attributes=0;
item_no=3, level=0, item="User Guide", no_of_attributes=0;

```

headline invoke subpictures 201 and 202 to be displayed. The attributes include a parameter *graphic\_no* (see Graphic Info section) so as to identify the location of the subpicture in the relevant memory segment of the receiver.

## 5 Operation of the receiver

The operation is determined by a control program stored in a memory of microprocessor 25 (Fig.1). Fig.9 shows a flow chart of operations carried out by the microprocessor. In an initial step 41, the processor determines the sequence of teletext pages constituting the database. As already mentioned above, a predetermined page comprises the list of pages to be acquired. In the step 41, the processor applies the relevant page numbers to the data decoder 23 (Fig.1). As each page arrives, the data accommodated therein are stored in memory 24 (Fig.1). The processor sorts the received data so as to store each section of the database in a corresponding segment of said memory. During this process, the user may use the television receiver for other purposes, e.g. watching a television programme. The process may also be carried out in a standby state of the receiver, e.g. during the night.

A step 42 is executed when the user desires to consult the television program guide. In this step, the processor searches, in the memory segment holding the Menu Info section, all items relevant to the menu to be displayed. For the initial main menu, this step is equivalent to searching all items having *level*=0. In a step 43, the menu is composed and displayed using the display parameters such as text font, height, spacing, colour, etc. as defined in the Layout Info section stored in a predetermined segment of memory 24 (Fig.1). The processor further checks whether an attribute {GRPHCS,...} is associated with the headline. Actions in response to such an attribute will be described in more details in the paragraph "Description of receiver embodiments".

In a step 44, the processor controls the position of a cursor displayed on screen in response to cursor positioning signals from remote cursor control device 27 (Fig.1). In a step 45, the processor determines whether a menu item is selected by the user.

If that is not the case, the processor returns to step 44 so as to reposition the cursor in response to the positioning signals received from remote control device 27 (Fig.1). If a menu item is selected, the processor returns to step 42 so as to display a new menu.

## 5 Description of receiver embodiments

Fig.10 shows, in more details, a first embodiment of the display section of receiver 2 (Fig.1). This embodiment relates to a character-based display device. Memory 24 (Fig.1) of the receiver comprises a segment 241 in which a character code is stored for each character to be displayed, a read-only segment 242 keeping the pixel patterns of  
10 common alphanumeric symbols, and a random-access memory segment 243 keeping the pixel patterns (D1,D2) of the motion phases of dynacons. The character codes are successively read-out, from left to right and from top to bottom, in response to read addresses supplied by graphic generator 26. Character codes X representing a common symbol address a respective location in ROM section 242. Character codes D representing a dynacon address a respective  
15 location in RAM section 243. The pixels stored in the addressed segment are applied to graphic generator 26 and displayed on television monitor 22 (Fig.1). In order to obtain the desired animation, the processor 25 cyclically writes the character codes for motion phases D1 and D2 in memory segment 241.

Fig.11 shows a second embodiment. This embodiment-relates to a bit-mapped device. Memory 24 (Fig.1) of the receiver now comprises a memory segment 244  
20 having a memory location for each individual pixel to be displayed, and a memory segment 245 for keeping the pixel patterns of common alphanumeric symbols as well as the pixel patterns of the motion phases (D1,D2) of dynacons. Both segments are of the RAM type. In order to display an image, the processor 25 copies the relevant pixel patterns stored in  
25 segment 245 to segment 244. The processor alternately writes the pixel patterns D1 and D2 into the part of memory 244 denoted D so as to form a dynacon. The pixels stored in segment 244 are successively read-out, from left to right and from top to bottom, in response to a read address supplied by graphic generator 26.

Fig.12 shows a third embodiment. A bit-mapped memory segment now  
30 comprises two or more layers 247 and 248, one for each motion phase. In the embodiment shown, two 1-bit layers are provided. Both layers are read-out simultaneously so as to obtain a 2-bits value for each pixel. The pixel values are applied to a colour-look-up-table 261 (CLUT) included in graphics generator 26 (Fig.1) and address a colour definition stored

therein. The processor cyclically updates the CLUT or, what is equivalent, switches between two different CLUTs. To elucidate the operation of this embodiment, motion phase D1 having a 1-bit wide pixel pattern 110 is stored in layer 248 and motion phase D2 having a pixel pattern 011 is stored in layer 247. The two motion phases are supplied to CLUT 261 as 2-bit wide pixels 01, 11 and 10, successively. For displaying motion phase D1, a background colour B and foreground colour F are stored in the CLUT as indicated in column D1. For displaying motion phase D2, the colours are stored as indicated in column D2. As can readily be understood, the switching from column D1 to column D2 causes the effect of a horizontal piece of a line which moves to the right.

It is noted that the graphic picture data are not necessarily to be accommodated in the vertical flyback period of a broadcast television signal. They can also be transmitted via a telephone network or computer network (e.g. Internet), or distributed on storage media such as CDROM or computer diskettes. Accordingly, the receiver may take the form of a data processing and display unit (e.g. a personal computer), provided with an appropriate interface circuit ("extension card") for receiving the data signals.

In summary, a method and arrangements for transmitting, receiving and displaying graphic images is disclosed. The graphic images include dynamic icons (dynacons), i.e. graphic subpictures comprising two or more motion phases. By alternately displaying said motion phases, an attractive motion is created. They enhance the appearance of graphic images considerably. This is especially useful in the transmission of an electronic television program guide, e.g. to indicate the type of television programs to come.

Claims

1. Method of transmitting graphic images, comprising the step of transmitting data defining pixels of a displayable subpicture, and the step of transmitting data invoking said subpicture for display on a receiver, characterized in that the step of transmitting pixel defining data includes the transmission of pixel defining data for at least  
5 two motion phases of said subpicture to be displayed cyclically.
2. Method according to claim 1, wherein the step of transmitting pixel defining data further includes the transmission of a time code representing a time interval between displaying the successive motion phases of said subpicture.
3. A transmitter for transmitting graphic images, comprising means for  
10 transmitting data defining pixels of a subpicture to be stored in a receiver, and means for transmitting data invoking said subpicture for display on said receiver, characterized in that the means for transmitting pixel defining data is adapted to include the transmission of pixel defining data for at least two motion phases of said subpicture to be displayed cyclically.
4. Transmitter according to claim 3, wherein the means for transmitting  
15 pixel defining data is further adapted to include the transmission of a time code representing a time interval between displaying the successive motion phases of said subpicture.
5. A display signal generator for generating graphic image display signals, comprising first memory means for storing data defining pixels of a subpicture, second memory means for storing data invoking said subpicture for display, and display signal  
20 generating means for reading said first memory means in response to invoking data stored in said second memory means so as to generate the pixels of the subpicture, characterized in that the first memory means is adapted to store the pixel defining data for at least two motion phases of said subpicture, the display generating means being adapted, in response to the invoking data, to cyclically read from the first memory means the data defining stored pixel  
25 invoking data motion phases of the subpictures.
6. A display signal generator according to claim 5, comprising further memory means for storing a time code representing a time interval, wherein the display means is adapted to cyclically read the motion phases stored in response to the invoking data.

7. Receiver for receiving and processing graphic image display signals, said receiver comprising a display signal generator according to any of claims 5 or 6, and further comprising means for receiving and decoding said pixel defining data and invoking data and adapted to store said data in said memory means.
- 5 8. Videorecorder, comprising a receiver according to claim 7.
9. A signal representing a graphic image, comprising data defining pixels of a displayable subpicture and data invoking said subpicture for display, characterized in that the pixel defining data includes pixel defining data for at least two motion phases of said subpicture to be displayed cyclically.
- 10 10. A storage medium on which a signal according to claim 9 has been stored.



1/5

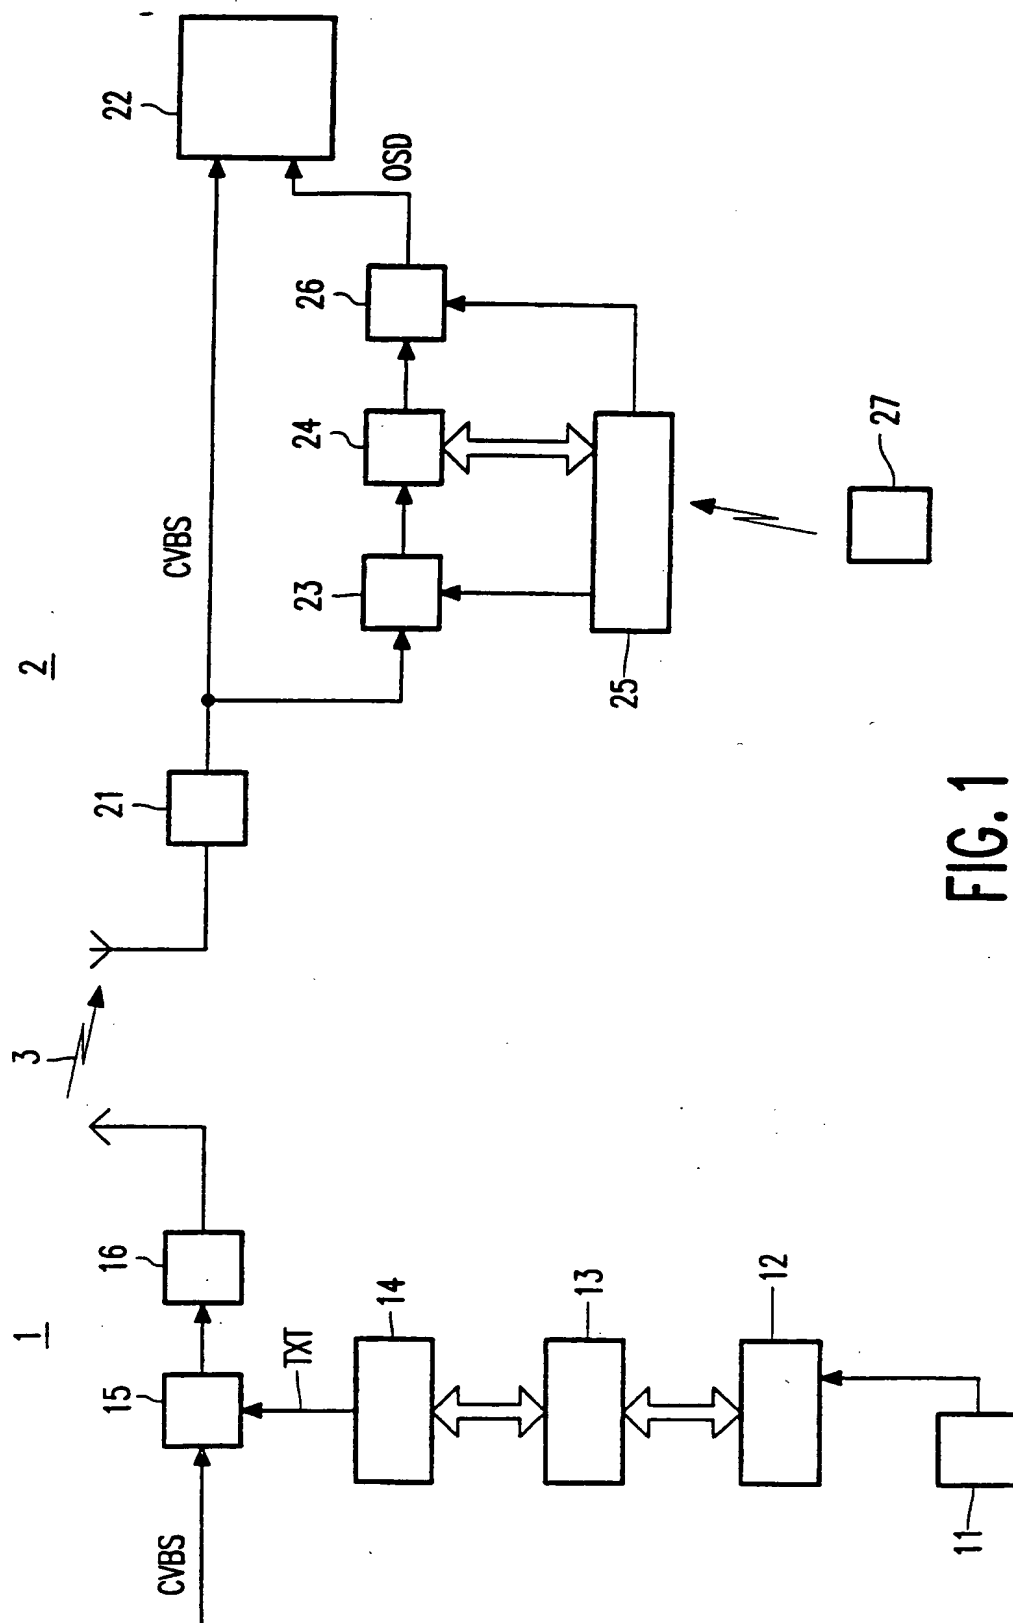


FIG. 1

2/5

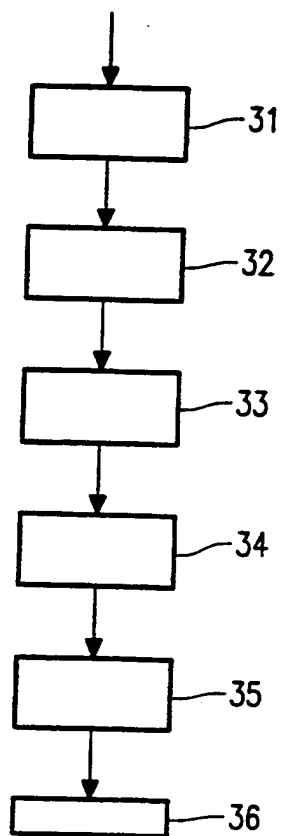


FIG. 2

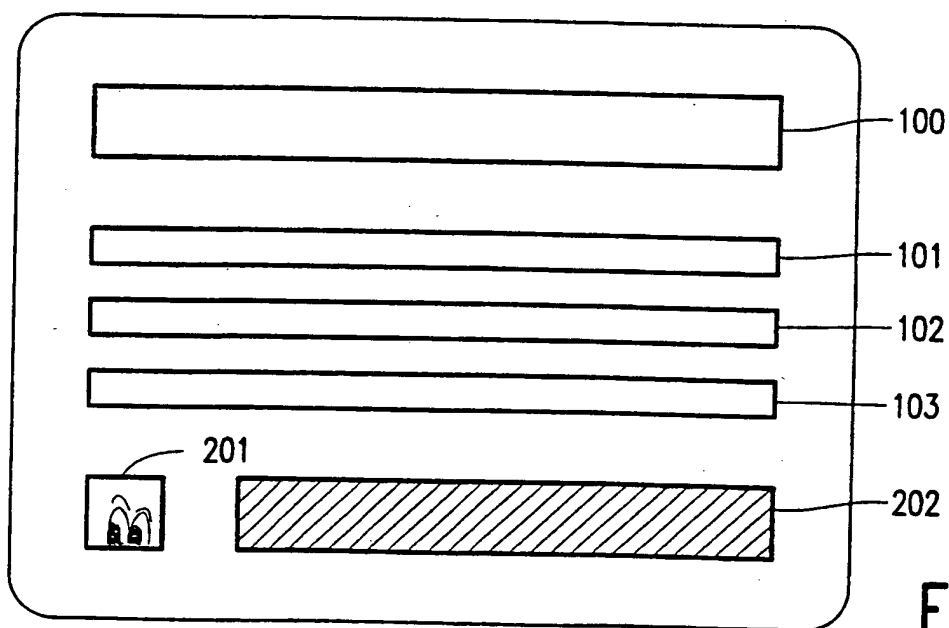


FIG. 8

3/5



FIG. 3



FIG. 4



FIG. 5



FIG. 6




FIG. 7

4/5

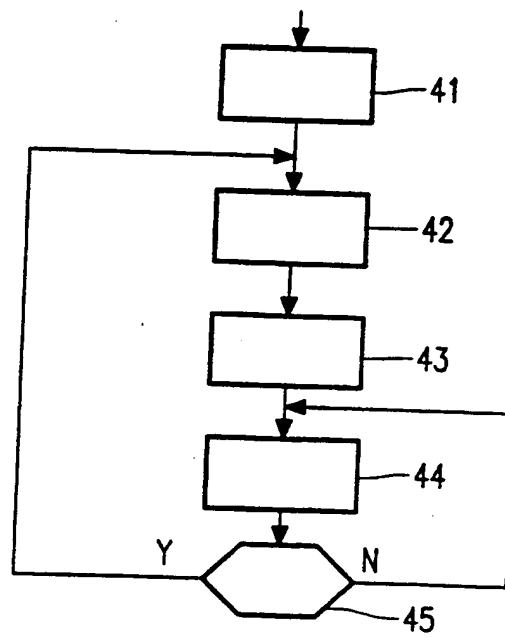


FIG. 9

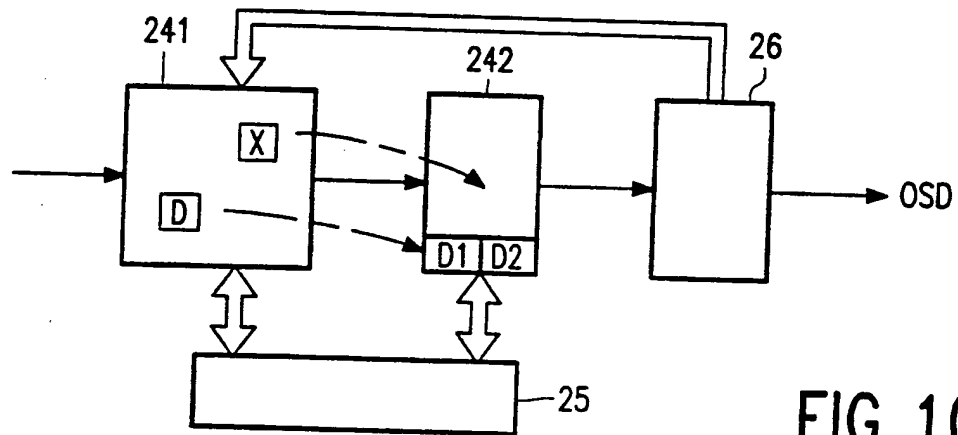


FIG. 10

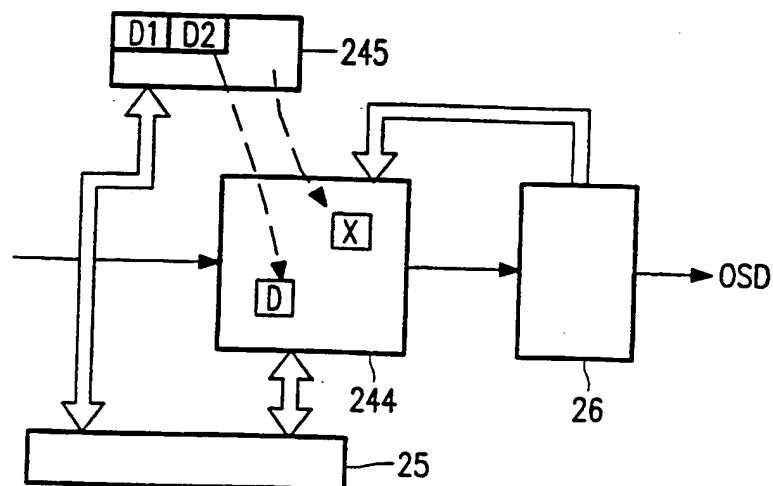


FIG. 11

5/5

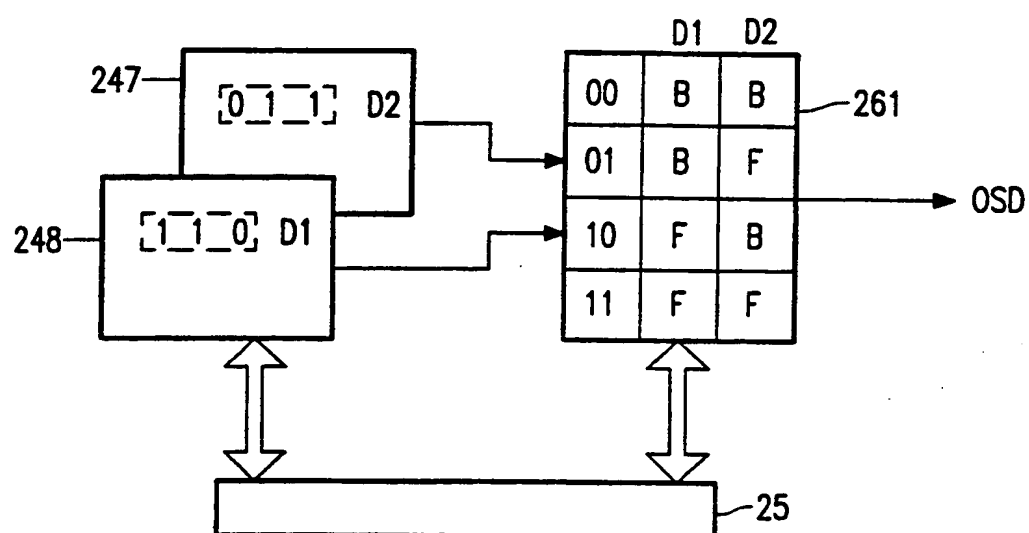


FIG. 12


**This Page Blank (uspto)**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04N 7/025, 7/52, 7/088 // H04N 5/445</b>		<b>A3</b>	(11) International Publication Number: <b>WO 97/02700</b>
			(43) International Publication Date: 23 January 1997 (23.01.97)
(21) International Application Number: <b>PCT/IB96/00629</b>		(81) Designated States: AU, BR, CA, CN, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 1 July 1996 (01.07.96)			
(30) Priority Data: 95201808.3 3 July 1995 (03.07.95) EP (34) Countries for which the regional or international application was filed: NL et al. 95202304.2 25 August 1995 (25.08.95) EP (34) Countries for which the regional or international application was filed: NL et al.		<b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).		(88) Date of publication of the international search report: 27 February 1997 (27.02.97)	
(71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE).			
(72) Inventors: CLARK-SCHREYER, Veronika; Wiedner Hauptstrasse 33/12, A-1040 Vienna (AT). ERKINGER, Erwin; Meißauergasse 30, A-1220 Vienna (AT).			
(74) Agent: SCHMITZ, Herman, J., R.; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).			

(54) Title: TRANSMISSION OF GRAPHIC IMAGES

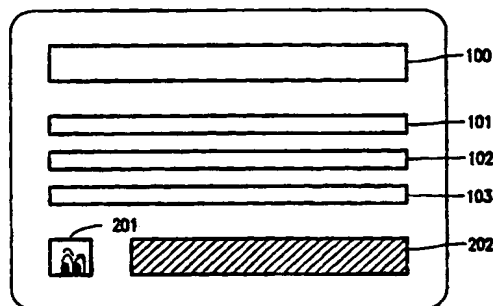

## (57) Abstract

A method and arrangements for transmitting, receiving and displaying graphic images. The graphic images include dynamic icons (dynacons), i.e. graphic subpictures comprising two or more motion phases. By alternately displaying said motion phases, an attractive motion is created. They enhance the appearance of graphic images considerably. This is especially useful in the transmission of an electronic television program guide, e.g. to indicate the type of television programs to come.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Larvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 96/00629

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04N 7/025, H04N 7/52, H04N 7/088 // H04N 5/445  
According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	IEEE TRANSACTIONS ON CONSUMER ELECTRONICS, Volume 39, No 4, November 1993, (NEW YORK, US), LEI ET AL, "A New Architecture for a TV Graphics Animation Module", pages 795-88, XP000423066, see page 795 - page 796 --	1-9
Y	US 5089899 A (S. NOMURA ET AL), 18 February 1992 (18.02.92), claims 1-4, abstract --	1-9
A	EP 0624979 A2 (PHILIPS ELECTRONICS N.V.), 17 November 1994 (17.11.94), claim 1, abstract --	1-9

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 January 1997

Date of mailing of the international search report

29.01.1997

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Michel Gascoin  
Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 96/00629

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5422674 A (D.F. HOOPER ET AL), 6 June 1995 (06.06.95), abstract  --	1-9
E,A	WO 9638008 A1 (THOMSON CONSUMER ELECTRONICS, INC.), 28 November 1996 (28.11.96), abstract  -- -----	1-9

INTERNATIONAL SEARCH REPORT  
Information on patent family members

28/10/96

International application No.

PCT/IB 96/00629

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 5089899	18/02/92	JP-B- 2531795 JP-A- 3032288	04/09/96 12/02/91
EP-A2- 0624979	17/11/94	BE-A- 1007167 JP-A- 7046474	11/04/95 14/02/95
US-A- 5422674	06/06/95	EP-A- 0660609 US-A- 5493638	28/06/95 20/02/96
WO-A1- 9638008	28/11/96	GB-D- 9510507	00/00/00

**This Page Blank (uspto)**